



The *Choices* brand

Windows, Doors, Conservatories

SIMPLE • SUSTAINABLE • COMPLIANT

# 'Choices' Aluminium In-line Sliding Doors

## ALUK S67 Slim In-Line Sliding Doors

**ALUK**



### S67 SLIM IN-LINE SLIDING DOOR

| Performance and accreditations          | S67        |
|-----------------------------------------|------------|
| U-Value (Double Glazing) (Ug: 1.0W/m²k) | 1.4W/m²k   |
| Air Permeability                        | Class A4   |
| Water Tightness                         | Class 9A   |
| Wind Resistance                         | Class B3   |
| Acoustic                                | 30 - 40 dB |

### System

|       |                                         |
|-------|-----------------------------------------|
| Depth | 67mm (Twin Rail)<br>130mm (Triple Rail) |
|-------|-----------------------------------------|

### Size and weight limits

|                     |        |
|---------------------|--------|
| Maximum Leaf Height | 2400mm |
| Maximum Leaf Width  | 1350mm |
| Maximum Leaf Weight | 55kg   |

### Glazing


|                   |                            |
|-------------------|----------------------------|
| Glazing Thickness | 24mm Double<br>32mm Triple |
|-------------------|----------------------------|



**SUSTAINABLY SOURCED**  
**78% RECYCLED**  
ALUMINIUM BILLET CONTENT

## Colour Options


for fast delivery

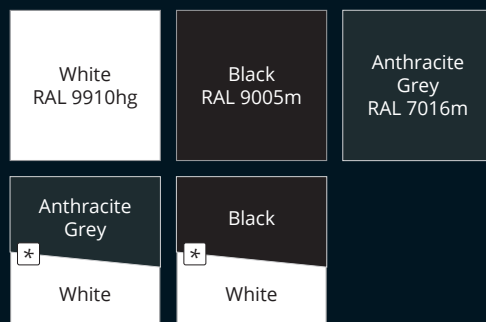

\* Not Triple Track or Low Threshold options

## Configurations

### DOUBLE TRACK



### TRIPLE TRACK



### Handle Colours

White, Black, Grey, Silver

SIMPLE • SUSTAINABLE • COMPLIANT

**ALUK**

## ‘Choices’ Aluminium In-line Sliding Doors




### ALUK S67 Slim In-Line Sliding Doors



SUSTAINABLY SOURCED  
**78% RECYCLED**  
ALUMINIUM BILLET CONTENT

#### Key Features

- ✓ S67 is a modern, versatile solution that blends contemporary design with impressive thermal performance
- ✓ Ultra slim 35mm interlock (standard and reinforced options)
- ✓ Low 22mm threshold optional
- ✓ Multipoint locking system
- ✓ Adjustable rollers (0 to + 4 mm)
- ✓ Maximum weight per sash of 50kg or 2.4m<sup>2</sup> (200kg with customer collection via 'Hiab')
- ✓ 2.4m x 2.4m door size 2-pane (Guidance)
- ✓ 3.6m x 2.4m door size 3-pane (Guidance)
- ✓ 4.8m x 2.4m door size 4 pane (Guidance)
- ✓ Min sash sizes 730mm x 450mm
- ✓ Available in double and triple track configurations
- ✓ U-value compliant of 1.4W/m<sup>2</sup>k (Refurbishment) 24mm double glazed unit (DGU)
- ✓ U-value compliant of 1.3/1.4W/m<sup>2</sup>k 32mm triple glazed unit (TGU)
- ✓ Ex-stock colours: White (9910HG), Anthracite Grey (7016M), Black (9005M), Grey/White, Black/White- Fast delivery in 2-3 weeks
- ✓ The pre glazed sash with adjustable rollers also offers a fast installation

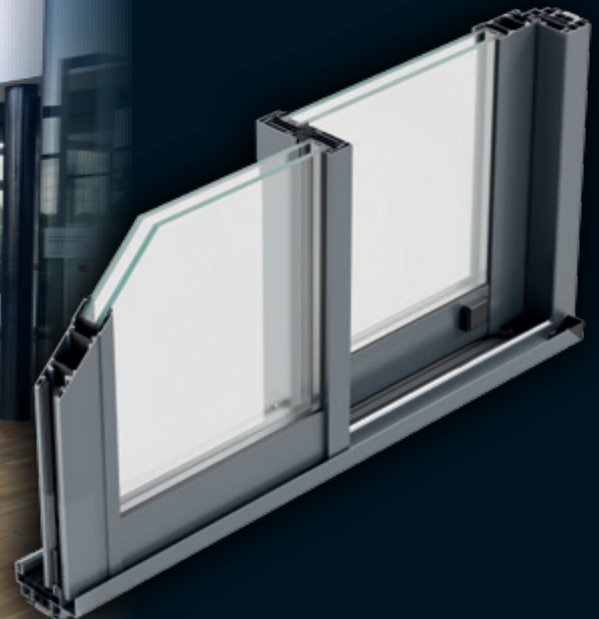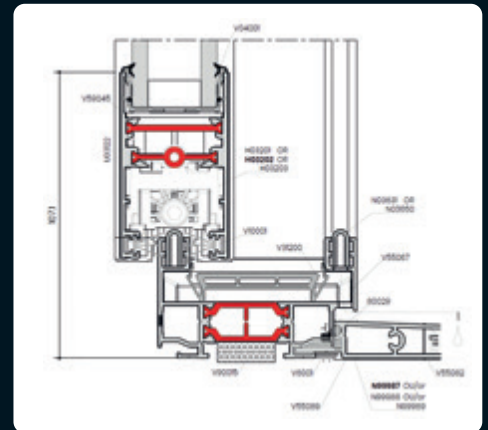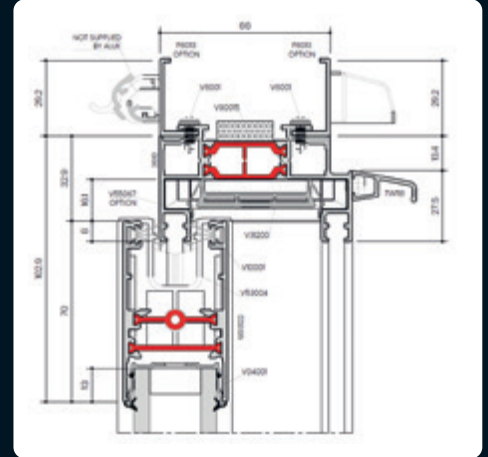

**Why not consider the other collections available from** *The Choices brand*  
Windows, Doors, Conservatories & Orangeries manufactured from state of the art  
PVCU and Aluminium for Domestic and Commercial properties.